



DELL PowerEdge T360 server 2 TB Tower (4.5U) Intel Xeon E E-2478 2.8 GHz 16 GB DDR5-SDRAM 600 W

Brand : DELL

Product family: PowerEdge

Product code: T360-FY25Q3


Product name : T360

DELL PowerEdge T360. Processor family: Intel Xeon E, Processor frequency: 2.8 GHz, Processor: E-2478. Internal memory: 16 GB, Internal memory type: DDR5-SDRAM. Total storage capacity: 2 TB, Hard drive size: 3.5", Hard drive interface: SATA III. Ethernet LAN connection, Cabling technology: 10/100/1000Base-T(X). Power supply: 600 W, Redundant power supply (RPS) support. Form factor: Tower (4.5U)



| Processor | | Design | |
|--------------------------------------------|---------------------------|----------------------------------------------|----------------------------------------------------------------|
| Processor manufacturer * | Intel | Product colour | Black |
| Processor family * | Intel Xeon E | Performance | |
| Processor model * | E-2478 | Remote administration | iDRAC9, Basic 16G |
| Processor frequency * | 2.8 GHz | Software | |
| Processor boost frequency | 5.2 GHz | Operating system installed * | ✗ |
| Performance cores | 8 | Compatible operating systems * | Canonical Ubuntu Server LTS |
| Processor cores | 8 | | Microsoft Windows Server with Hyper-V Red Hat Enterprise Linux |
| Processor cache | 24 MB | | SUSE Linux Enterprise Server VMware ESXi |
| Number of processors installed | 1 | Power | |
| Thermal Design Power (TDP) | 80 W | Redundant power supply (RPS) support * | ✓ |
| Processor threads | 16 | Power supply * | 600 W |
| Memory types supported by processor | DDR5-SDRAM | Number of redundant power supplies supported | 2 |
| Memory clock speeds supported by processor | 4800 MHz | Number of redundant power supplies installed | 2 |
| Memory | | Power supply input voltage | 125 V |
| Internal memory * | 16 GB | Power cable length | 3 m |
| Internal memory type * | DDR5-SDRAM | Power cable connector 1 | C13 coupler |
| Buffered memory type | Unregistered (unbuffered) | Power cable current | 15 A |
| Memory slots | 4x DIMM | Operational conditions | |
| ECC | ✓ | Storage temperature (T-T) | -40 - 65 °C |
| Memory data transfer rate | 4800 MT/s | Storage relative humidity (H-H) | 5 - 95% |
| Maximum internal memory * | 128 GB | Operating altitude | 0 - 2048 m |
| Storage | | Non-operating altitude | 0 - 12000 m |
| Total storage capacity * | 2 TB | | |
| Number of HDDs installed | 1 | | |
| HDD capacity | 2 TB | | |
| HDD interface | SATA III | | |

| Storage | | Carbon footprint | |
|-------------------------------------------------|----------------------------------------|---------------------------------------------------------|-------------|
| HDD speed | 7200 RPM | Total carbon footprint (kg of CO2e) | 1409 |
| HDD size | 3.5" | Total carbon emissions, standard deviation (kg of CO2e) | 1213 |
| RAID support * | ✓ | Carbon emissions, manufacturing (kg of CO2e) | 296 |
| Supported RAID controllers | PERC H755 | Carbon emissions, logistics (kg of CO2e) | 155 |
| Hot-Plug support | ✓ | Carbon emissions, energy usage (kg of CO2e) | 930 |
| Optical drive type * | ✗ | Carbon emissions, end-of-life (kg of CO2e) | 28 |
| Internal drive bays | 8 | Total carbon emissions, w/o use phase (kg of CO2e) | 479 |
| Network | | PAIA version | 1.4.0, 2024 |
| LAN controller | Broadcom 5720, Intel I210, Intel® X722 | Weight & dimensions | |
| Ethernet LAN | ✓ | Width | 175 mm |
| Cabling technology | 10/100/1000Base-T(X) | Depth | 581.1 mm |
| Ethernet interface type | Gigabit Ethernet | Height | 369.5 mm |
| Ports & interfaces | | Technical details | |
| Ethernet LAN (RJ-45) ports * | 2 | Supported storage drives form factor (internal) | 3.5" |
| USB 2.0 ports quantity | 5 | Other features | |
| USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity | 2 | Data transfer rate | 6 Gbit/s |
| VGA (D-Sub) ports quantity | 1 | Bytes per sector | 512n |
| Serial ports quantity | 1 | | |
| Expansion slots | | | |
| PCI Express x4 slots | 2 | | |
| Design | | | |
| Chassis type * | Tower (4.5U) | | |

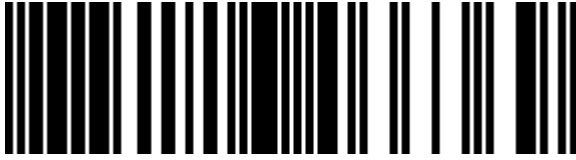

0884116466369



884116466369

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.