



## DELL PowerEdge T360 server 2 TB Tower (4,5U) Intel Xeon E E-2478 2,8 GHz 16 GB DDR5-SDRAM 600 W

**Merk :** DELL

**Productfamilie:** PowerEdge

**Artikelcode:** T360-FY25Q3


**Productnaam :** T360

DELL PowerEdge T360. Processorfamilie: Intel Xeon E, Frequentie van processor: 2,8 GHz, Processormodel: E-2478. Intern geheugen: 16 GB, Intern geheugentype: DDR5-SDRAM. Totale opslagcapaciteit: 2 TB, HDD omvang: 3.5", HDD interface: SATA III. Ethernet LAN, Bekabelingstechnologie: 10/100/1000Base-T(X). Netvoeding: 600 W, Redundante voeding. Type behuizing: Tower (4,5U)



| Processor                                  |                           | Design                                       |                                  |
|--|---------------------------|--|----------------------------------|
| Processor manufacturer *                   | Intel                     | Product colour                               | Black                            |
| Processor family *                         | Intel Xeon E              | Performance                                  |                                  |
| Processor model *                          | E-2478                    | Remote administration                        | iDRAC9, Basic 16G                |
| Processor frequency *                      | 2.8 GHz                   | Software                                     |                                  |
| Processor boost frequency                  | 5.2 GHz                   | Operating system installed *                 | ✗                                |
| Performance cores                          | 8                         | Compatible operating systems *               | Canonical Ubuntu Server LTS      |
| Processor cores                            | 8                         |  | Microsoft Windows Server with    |
| Processor cache                            | 24 MB                     |  | Hyper-V Red Hat Enterprise Linux |
| Number of processors installed             | 1                         |  | SUSE Linux Enterprise Server     |
| Thermal Design Power (TDP)                 | 80 W                      |  | VMware ESXi                      |
| Processor threads                          | 16                        | Power  |                                  |
| Memory types supported by processor        | DDR5-SDRAM                | Redundant power supply (RPS) support *       | ✓                                |
| Memory clock speeds supported by processor | 4800 MHz                  | Power supply *                               | 600 W                            |
| Memory                                     |                           | Number of redundant power supplies supported | 2                                |
| Internal memory *                          | 16 GB                     | Number of redundant power supplies installed | 2                                |
| Internal memory type *                     | DDR5-SDRAM                | Power supply input voltage                   | 125 V                            |
| Buffered memory type                       | Unregistered (unbuffered) | Power cable length                           | 3 m                              |
| Memory slots                               | 4x DIMM                   | Power cable connector 1                      | C13 coupler                      |
| ECC  | ✓                         | Power cable current                          | 15 A                             |
| Memory data transfer rate                  | 4800 MT/s                 | Operational conditions                       |                                  |
| Maximum internal memory *                  | 128 GB                    | Storage temperature (T-T)                    | -40 - 65 °C                      |
| Storage                                    |                           | Storage relative humidity (H-H)              | 5 - 95%                          |
| Total storage capacity *                   | 2 TB                      | Operating altitude                           | 0 - 2048 m                       |
| Number of HDDs installed                   | 1                         | Non-operating altitude                       | 0 - 12000 m                      |
| HDD capacity                               | 2 TB                      |  |                                  |
| HDD interface                              | SATA III                  |  |                                  |

| Storage   |  | Carbon footprint  |             |
|---|--|---|-------------|
| HDD speed                                       | 7200 RPM                               | Total carbon footprint (kg of CO2e)                     | 1409        |
| HDD size  | 3.5"                                   | Total carbon emissions, standard deviation (kg of CO2e) | 1213        |
| RAID support *                                  | ✓                                      | Carbon emissions, manufacturing (kg of CO2e)            | 296         |
| Supported RAID controllers                      | PERC H755                              | Carbon emissions, logistics (kg of CO2e)                | 155         |
| Hot-Plug support                                | ✓                                      | Carbon emissions, energy usage (kg of CO2e)             | 930         |
| Optical drive type *                            | ✗                                      | Carbon emissions, end-of-life (kg of CO2e)              | 28          |
| Internal drive bays                             | 8                                      | Total carbon emissions, w/o use phase (kg of CO2e)      | 479         |
| Network   |  | PAIA version  | 1.4.0, 2024 |
| LAN controller                                  | Broadcom 5720, Intel I210, Intel® X722 | Weight & dimensions                                     |             |
| Ethernet LAN                                    | ✓                                      | Width   | 175 mm      |
| Cabling technology                              | 10/100/1000Base-T(X)                   | Depth   | 581.1 mm    |
| Ethernet interface type                         | Gigabit Ethernet                       | Height  | 369.5 mm    |
| Ports & interfaces                              |  | Technical details                                       |             |
| Ethernet LAN (RJ-45) ports *                    | 2                                      | Supported storage drives form factor (internal)         | 3.5"        |
| USB 2.0 ports quantity                          | 5                                      | Other features  |             |
| USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity | 2                                      | Data transfer rate                                      | 6 Gbit/s    |
| VGA (D-Sub) ports quantity                      | 1                                      | Bytes per sector  | 512n        |
| Serial ports quantity                           | 1                                      |   |             |
| Expansion slots                                 |  |   |             |
| PCI Express x4 slots                            | 2                                      |   |             |
| Design  |  |   |             |
| Chassis type *                                  | Tower (4.5U)                           |   |             |

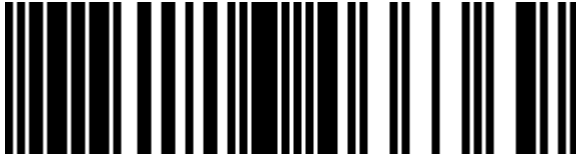

0884116466369



884116466369

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.